

Pat'd Feb 17



5 MAR 2005

1/529521



INVESTOR IN PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport

South Wales 02 DEC 2003

NP10 8QQ

WIPO

PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 6 November 2003

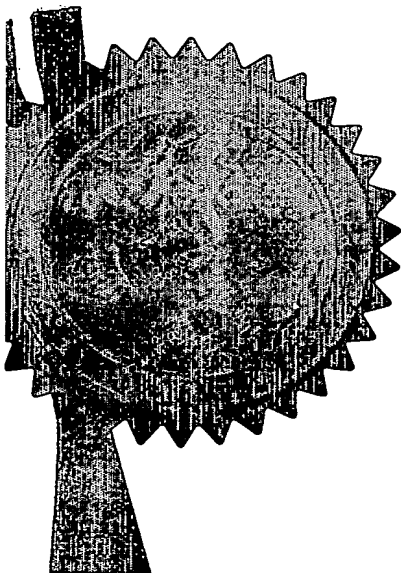

BEST AVAILABLE COPY



The Patent Office

1/77

Patents Form 1/77

Patents Act 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport

27SEP02 E751350-7 002829 Gwent, NP10 8QQ

1. Your reference HCD/KT/J00044774GB1/7700 0.00-0222380.8

2. Patent application number 26 SEP 2002
(The Patent Office will fill in this)

3. Full name of the or of each applicant 0222380.8
(underline all surnames)
Qualcomm (UK) Limited
Spectrum Point, 2nd Floor
279 Farnborough Road
Farnborough
Hampshire GU14 7LS
United Kingdom

Patents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

UK 8029621 002

4. Title of the invention
A Transmitter and a Method of Calibrating Power in Signals Output from a Transmitter

5. Name of your agent *(if you have one)*
RGC Jenkins & Co
"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*
26 Caxton Street
London SW1H 0RJ
United Kingdom
Patents ADP number *(if you know it)*
03966736001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications <i>(and if you know it) the or each application number</i>	Country	Priority application number <i>(if you know it)</i>	Date of filing <i>(day / month / year)</i>
---	---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day / month / year)</i>
---	-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request *(Answer 'Yes' if:*
a) *any applicant named in part 3 is not an inventor, or*
b) *there is an inventor who is not named as an applicant, or*
c) *any named applicant is a corporate body.*
See note (d))
Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 15

Claim(s) 5

Abstract 1 *DMC*

Drawing(s) 8+8

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) *Yes* ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature *RGC Jenkins & Co* Date 26 September 2002

RGC JENKINS & CO

12. Name and daytime telephone number of person to contact in the United Kingdom

Hugh Dunlop - 020 7931 7141

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay, please contact the Patent Office.*

A TRANSMITTER AND A METHOD OF CALIBRATING POWER IN SIGNALS OUTPUT FROM A TRANSMITTER

BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention relates generally to a transmitter and to a method of calibrating power in signals output from a transmitter. The invention is useful for controlling the current in a power amplifier in a mobile phone but is not limited to such an application.

II. Description of the Related Art

Until now the emphasis in handset transmitter design for cellular systems has focused on obtaining adequate linearity in the transmitter. The challenge of obtaining high efficiency has only very recently started to be examined. Existing handset designs therefore have very inefficient transmitters. Power control is a significant aspect of the design of cellular based mobile phone systems, particularly, but not exclusively, in systems based on the various CDMA standards that have been developed in recent years and continue to be developed.

Power amplifiers are used in mobile phones to control the power in signals transmitted by the mobile phones. Hitherto such power amplifiers have had either no means to control the bias conditions of the active devices, or some form of very crude means of doing so. Some power amplifiers have been designed to operate in one of two modes, namely a low current mode and a high current mode. The high-current mode is used to obtain adequate linearity at the highest required output powers, and the low-current mode is used to obtain adequate linearity at lower power levels with reduced supply current.

Control circuitry associated with the power amplifier is arranged to generate a control signal for switching the power amplifier between the two modes depending on the required output power. In these amplifier circuits the current control signal is a binary signal that switches operation of the power amplifier between low and high current modes. At lower levels the reduced current drawn from the battery compromises the linearity of the power amplifier. However, at lower output powers there is also less of a requirement for linearity, so the low current mode is used during

operation at lower output powers. When the output power from the power amplifier exceeds a certain value (usually between 10 dBm and 20 dBm), the reduced linearity causes the performance to come close to specified limits.

5 In the case of WCDMA, the parameters of interest are the Adjacent Channel Leakage Ratio (ACLR) and the spectral emission mask. When these values exceed respective predetermined thresholds the power amplifier is switched over to the high current mode, where the linearity is improved at the expense of the higher current drawn from the battery.

10 While such an arrangement enables the power to be controlled, it does not minimize power consumption during a call. Minimizing power consumption is important in any mobile device because the amount of available battery energy is limited. Hitherto the current control signal has been arranged to change state when it is necessary for the power amplifier to change between the low and high current modes. The actual switching point is usually specified as a certain power amplifier
15 output power. Operation of the power amplifier is at an optimum in terms of linearity, efficiency and power only at maximum power and at the point where the amplifier switches between the low and high current modes.

While the forgoing arrangement is adequate in that it enables accurate power control, it is less than satisfactory in that it does not minimize power consumption by
20 the mobile phone during a call.

SUMMARY OF THE INVENTION

The invention addresses the above-discussed problems.

25 According to one aspect of the invention there is provided a method of calibrating a transmitter circuit having a first characteristic controllable by a first control signal and a second characteristic controllable by a second control signal, the method comprising: defining a set of multiple signal values for the first control signal; setting the first control signal to a level corresponding to a signal value from the set of
30 multiple first control signal values; adjusting the second control signal to cause the transmitter to operate in a desired manner; measuring power in a signal transmitted by the transmitter while operating in the desired manner; and repeating the setting, adjusting and measuring for each signal value in the set of multiple first control signal values.

According to another aspect of the invention there is provided a method of calibrating a transmitter circuit having a first characteristic controllable by a first control signal and a second characteristic controllable by a second control signal, the method comprising: defining a set of multiple signal values for the first control signal;
5 defining a set of multiple power values representing power in a signal transmitted by the transmitter; setting the first control signal to a level corresponding to a signal value from the set of multiple first control signal values; selecting a power value from the defined set of multiple power values; adjusting the second control signal to cause the transmitter to transmit a signal with a power corresponding to the selected power
10 value; and repeating the selecting and adjusting for each power value in the set of multiple power values.

According to a further aspect of the invention there is provided a transmitter comprising: a receiver for receiving power data specifying a power value; an amplifier having a first characteristic controllable by a first control signal and a
15 second characteristic controllable by a second control signal; a store for storing data representing power values, corresponding first control signal values and corresponding second control signal values; a controller coupled to the receiver and the store and responsive to the received power data for generating from the data stored in the store a first control signal for controlling the first characteristic and a second
20 control signal for controlling the second characteristic.

One aim of the invention is to minimize the power supply current drawn by the power amplifier over the whole dynamic range of the transmitter. This enables battery life to be extended because the power consumed by the power amplifier will be limited to that necessary to transmit at the required transmit power level.

25 The method of dynamic control of power amplifier current to be described herein takes advantage of a continuous, or near-continuous, bias adjustment capability to optimize the operation in terms of linearity, efficiency and power over the whole dynamic range of the amplifier. Instead of the hitherto used digital control line and two modes of operation, the method uses a current-control input that has a multiplicity
30 of states (alternatively, the amplifier may be responsive to a continuously adjustable analogue voltage). The multi-state input is used to set a specific amplifier bias condition for any specific output power level. It is thus possible to set an optimum supply current for any given output power, such that near-maximum efficiency is obtained with adequate linearity. In the case of a CDMA system, linearity of the

transmitter chain (in particular that of the power amplifier) determines the performance of the handset as measured by the previously mentioned two performance parameters, ACLR and spectral emission mask.

5 The above and further features of the invention are set forth with particularity in the appended claims and together with advantages thereof will become clearer from consideration of the following detailed description of an exemplary embodiment of the invention given with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10

In the drawings:

Figure 1 is a schematic block diagram of a transmitter;

Figure 2 is an example of a characteristic of a typical transmitter;

Figure 3 example of another characteristic of an amplifier in the transmitter;

15

Figure 4 represents a procedure for measuring values of the characteristic of Figure 3;

Figure 5 is a graph showing a set of discrete voltage values against a set of discrete output power values;

20

Figure 6 is a procedural flow diagram showing a process of measuring the gain control characteristic where several look-up tables are to be used;

Figure 7 illustrates how a required output power value is compared with the data in look-up tables created by the procedure shown in Figure 6;

Figure 8 shows an alternative calibration method;

25

Figure 9 illustrates how a required output power value is compared with the data in look-up tables created by the procedure shown in Figure 8;

Figure 10 is a block diagram illustrating another calibration procedure; and

Figure 11 is a block diagram of a streamlined version of the calibration procedure set out in Figure 10.

30

DETAILED DESCRIPTION OF AN EMBODIMENT OF THE INVENTION

Turning now to Figure 1 of the accompanying drawings there is shown a schematic block diagram of a transmitter 10. A transmitter such as the transmitter 10 illustrated in Figure 1 would commonly be used to transmit CDMA signals (or WCDMA or other CDMA standards) but is not limited to the transmission of such signal. For example, the transmitter could be used in a cellular system employing a QPSK modulation scheme or other modulation schemes with non-constant signal envelope.

The transmitter 10 comprises baseband circuitry 12 that contains circuitry (not shown) that generates signals representing voice, data or other information to be transmitted and control circuitry (not shown) that generates control signals for controlling operation of elements of the transmitter. Among other things the baseband circuitry will contain a processor and associated memory for processing data and generating control signals for the rest of the transmitter. The baseband circuitry 12 also contains circuits for generating data (representing voice or information for example) for transmission. That data is converted into a suitable form for transmission. For example, the baseband circuitry may contain an arrangement such as is described in WO-A-9200639. In that arrangement, data is converted into a modulated (CDMA) signal having both an in-phase (I) and quadrature (Q) components which can be applied to a carrier signal for transmission.

In the transmitter 10 shown in Figure 1, I and Q signals 13 containing information to be transmitted are output from the baseband circuitry 12 to an I/Q modulator 14 where they are modulated. The modulated signal 15 from the I/Q modulator 14 is input to a variable gain amplifier (VGA) 16, which also receives a gain control signal 17 from the baseband circuitry 12. The variable gain amplifier is provided to condition the modulated signal for subsequent stages by amplifying the signal to a substantially uniform size. The gain control signal 17 is typically an analogue voltage that is output from a digital to analog converter (DAC) (not shown) in the baseband circuitry 12. The gain-control signal 17 adjusts the gain in the transmitter 10.

Signals from the variable gain amplifier 16 are applied to a mixer 18 where they are mixed with signals generated by a local oscillator (LO) 19. Signals from the mixer 18 are filtered by a band pass filter 20 and then passed on to a power amplifier

22. The power amplifier 22 also receives a current control signal 23 from the baseband circuitry 12. The current control signal 23 adjusts the bias current in the power amplifier 22 depending on the power level required in the signal output therefrom. Signals output from the power amplifier 22 are filtered by a bandpass filter 24 before being output to an antenna 26 for transmission.

It will be appreciated by those possessed of the appropriate skills that although two separate amplifiers are shown in Figure 1, it is possible to provide both the gain control and the current control functions in a single amplifier. Also, the VGA amplifier 16 may be placed after the mixer 18. Moreover, the power amplifier 22 may consist of two or more stages of amplification, for example a power amplifier driver followed by a power amplifier, in which case the PA driver could serve as the VGA and be controlled by the gain control signal. The transmitter arrangement illustrated in Figure 1 has been chosen for its simplicity and its ability to facilitate understanding of the invention.

Similarly, will be appreciated that the gain control signal 17 (or a similar but separate gain control signal generated by the baseband circuitry 12) may also be input to the power amplifier 22 and that the current control signal 23 (or a similar but separate current control signal generated by the baseband circuitry 12) may also be input to the VGA 16. However for the purpose of simplicity of explanation these additional signals have been omitted from the drawing.

As has already been mentioned herein above, in previous transmitters the current control signal was a binary signal that enabled the power amplifier to change between low and high current modes depending on the required level of output power. Thus, in previous transmitters it was the gain control signal that provided most of the control over the power output from the transmitter, with the current control signal merely supplying a coarse control over the bias current applied to the power amplifier. In the transmitter circuit 10, the current control signal 17 is variable over a wide range of values, corresponding to setting the bias current at a value near to zero through to a maximum. Such a control signal enables optimum efficiency to be obtained over the whole dynamic range of the amplifier power. The current control signal 17 is a multi-state signal that may be a continuous analog signal or an N-bit digital signal.

Turning briefly to Figure 2 of the accompanying drawings, an example of a characteristic of the transmitter 10 is shown. The graph represents output power in the signal output to the antenna 26 for transmission against the gain control signal 17 for

a given bias current condition, i.e. a given control current signal value. As can be seen in Figure 2, the relationship between the output power at the antenna 26 and the gain control signal 17 is not linear. Component tolerances produce variations in parameters such as output power between different transmitters for any particular control voltage input.

The non-linear nature of the graph means that the characteristic cannot be easily represented as an equation. Therefore, in order to enable use of a multi-state current control signal 17, the non-linear power control characteristics of the transmitter need to be measured and stored. With this information the gain of the variable gain amplifier (VGA) 16 and the current of the power amplifier 22 can be set to achieve any output power within a desired dynamic range with optimum efficiency. The calibration procedure allows the determination of ideal values for both these control signals, for any required power level, by means of the use of a measurement technique and by the use of stored data in the form of one or more look-up tables or data arrays.

The measurement of the power control characteristic is done by way of a calibration procedure, which allows the mapping of the AGC and current-control signal values onto the required power values, such that both AGC signal and current-control signal can be set to optimum values for any required power level in order to obtain adequate performance with minimum supply current.

A procedure for measuring the transfer characteristic of the current control signal against output power will now be described. Data representing this characteristic is determined and stored first, before the gain control characteristic is measured. This is necessary because in the transmitter 17 the current needs to be set before setting the AGC in order to yield a prescribed ACLR (Adjacent Channel Leakage Ratio) performance with optimum or minimum supply current.

A voltage (V_{agc}) is used as the gain control signal 17 input to the VGA amplifier 16. Similarly, a voltage $V_{control}$ is used as the current control signal 23 input to the power amplifier 22. It should be noted that on presently available power amplifier devices, the current-control signal ($V_{control}$) is typically a simple bias input. What this means is that both the output power and the supply current vary according to both V_{agc} and $V_{control}$. This is simply because the input RF signal to the output device contributes towards the DC bias of that device, through the process of 'self-biasing'. Therefore, the approach, when a new power level is required, is to fix the

V_{control} signal to a pre-defined value for that power level, and adjust the V_{agc} signal to produce the required linearity for that value of V_{control} . The calibration process allows the definition of a pre-defined value of V_{control} for each power level, and either look-up or calculation of the required V_{agc} for that power level.

5 Figure 3 of the accompanying drawings shows one example of a characteristic of the amplifier in terms of V_{control} against output power (P) for a given ACLR. The dynamic range of the current control signal V_{control} is determined by this characteristic. At one end of the dynamic range the minimum voltage, $V_{\text{control}}(1)$ should be no greater than that specified for the power amplifier as the threshold voltage below which the
10 power amplifier is considered switched off. At the other end, the maximum voltage, $V_{\text{control}}(n)$, should be no less than a value where the maximum specified power is produced from the phone with slightly less than optimum efficiency. That is, $V_{\text{control}}(n)$ should have a sufficiently high value to allow efficient operation of the power amplifier up to the highest required power under the predicted operating
15 conditions.

Measurements of V_{control} are taken across the whole dynamic range with appropriate spacing between adjacent values of V_{control} . As an example, the spacing between any adjacent voltage values might be 50 millivolts. As another example, the spacing between values might vary according to a known typical power amplifier
20 characteristic, to give convenient intervals of power.

Figure 4 of the accompanying drawings represents a procedure for measuring values of the characteristic of Figure 3. The procedure begins in box 31 with an integer value i set to zero and is repeated for all values of i up to $i=m$. On the first pass through the procedure, therefore, the voltage of the current control signal is set to the
25 value C in box 32. Next, in box 33, the voltage of the gain control signal is adjusted until the ACLR reaches a set threshold (for example 3 dB within specification). The output power $P(1)$ is recorded at box 34 and values of $V_{\text{control}}(1)$ and $P(1)$ are then stored in a table at box 35. The value of i is incremented at box 36 and the procedure is then repeated with the value of the current control signal (V_{control}) set to $V_{\text{control}}(1)$,
30 and again until values of P have been stored against all values from $i=1$ to m of $V_{\text{control}}(i)$. The end result of this measurement procedure is a table that represents the characteristic of current control voltage against output power (as shown in Figure 3). Typically the results will be stored as a look-up table ("the current control look-up table") for to enable fast access to the data in subsequent stages.

Figure 5 is a graph that shows what a typical set of results stored in the current control look-up table could look like if plotted in graphical form; a set of discrete voltage values against a set of discrete output power values. The current control look-up table is used to calculate an appropriate value of current control voltage V_{control} for any required value of output power P . There are a number of ways in which the data from the current control look-up table can be used by the baseband circuitry to calculate the linear version of the transfer characteristic from the discrete values thus determined.

One way is to assume that the voltage between any adjacent output power values $P(i)$ and $P(i+1)$ is constant. If this assumption is made, then the linear transfer characteristic can be determined using several look-up tables, one for each of several different supply current settings, or by using one look-up table and measuring only one gain control characteristic. Figure 6 is a procedural flow diagram showing a process of measuring the gain control characteristic where several look-up tables are to be used. In the process shown in Figure 6 the procedure of measuring the gain control characteristic is repeated for every voltage level $V_{\text{control}}(1)$ to $V_{\text{control}}(m)$, that is stored in the current control look-up table. In this way $m+1$ look-up tables ("gain control look-up tables") are produced, one for every value of V_{control} .

Referring now to Figure 6, in block 40 values of j are defined from 1 to m , and in block 41 V_{control} is set to the j th value. Thus, the procedure is repeated for $m+1$ different values of V_{control} , i.e. $m+1$ different bias current settings. In block 42 values of i are defined from 1 to n . The value n in this procedure need not be the same as the value n in the procedure described herein above with reference to Figure 4. In block 43 the gain control signal V_{agc} is adjusted to give an output signal with a power equal to the desired power output $P(i)$. The values of $V_{\text{agc}}(i)$ and $P(i)$ are then stored as represented by block 44.

In block 45 the next value of i is selected and the operations represented by blocks 43 and 44 are repeated, until $i=n$, to give for the setting of $V_{\text{control}}(j)$ a value of V_{agc} and P for each value of $i=1$ to n . When $i=n$ in block 45, the j th gain control look-up table is complete. In block 47 the value of j is incremented. Blocks 41 to 46 are then repeated and this continues for all values of m . In this way, for all $m+1$ values of V_{control} a corresponding set of values for $V_{\text{agc}}(i)$ and $P(i)$ are stored.

Each gain control look-up table will of itself be relatively small because each look-up table will only include a relatively small range of values of $V_{\text{agc}}(i)$ and $P(i)$ for

a specific value of $V_{\text{control}}(j)$. The range is chosen to ensure that the ACLR threshold can be met for that $V_{\text{control}}(j)$ based on previously determined power amplifier characteristics. This is one method of calibrating V_{control} and V_{agc} against required power (P). Another method will be described below.

5 Storing the current control look-up table and the gain control look-up tables in a mobile phone enables the values to be used in control of the power in the signal transmitted by the phone. In a cellular system the power in a signal transmitted by a mobile phone is typically controlled in two ways. Firstly, the phone looks at changes the strength of signals that it is receiving and adjusts its output in the opposite
10 direction. This is known as "open loop" power control. Secondly, the phone receives control or command signals from a base station based on the strength of signals actually received at the base station from the mobile phone. If the signals are weak then the command will result in an increase the power in signals transmitted from the phone, and if the signals are strong the command will result in a decrease in power.
15 This is known as "closed loop" power control. Both forms of power control are described in US-A-5,056,109 and elsewhere and need not be described further herein.

Figure 7 of the accompanying drawings illustrates how during a "closed loop" call, the required output power is compared with the data in the look-up tables and with this data the baseband circuitry 12 (see Figure 1) sets the appropriate vales of
20 V_{agc} on line 17 and V_{control} on line 23. In block 50 the mobile phone receives data defining the output power (P) that the transmitter is required to output. In block 51 that P data is used to look-up a value for V_{control} in the current control look-up table. Depending on the resolution of the look-up table, the stored values of P may not correspond exactly with the required value specified by the received data. In this case
25 the closest stored value of P that is higher than required P will be selected to give a value of V_{control} . Once the value for V_{control} has been determined, it is used to select the appropriate gain control look-up table, as represented by block 52. Then, as shown in block 53, the received power data is again used, this time to identify a value for V_{agc} that will give an output power closest to and above the required output power. In this
30 way values of V_{control} and V_{agc} are determined. In block 54 those values are applied to the Power amplifier 22 and the VGA amplifier 16 by the baseband circuitry 12 (see Figure 1).

Thus, multi-state inputs are used to set a specific amplifier bias condition for any specific output power level. It is thus possible to set an optimum supply current

for any given output power, such that near-maximum efficiency is obtained with adequate linearity. In the case of a CDMA system, linearity of the transmitter circuitry, such as that shown in Figure 1 (in particular that of the power amplifier) determines the performance of the handset as measured by the previously mentioned
5 two performance parameters ACLR and spectral emission mask.

The procedure shown in Figure 7 is efficient in terms of microprocessor power, because it does not use complicated algorithms for calculations. However, it is inefficient in that it requires a lot of memory space to store the current control look-up table and the several $(m+1)$ gain control look-up tables. An alternative approach is to
10 use only one look-up table for the gain control characteristic. Data for this alternative is obtained by setting the current control voltage V_{control} to the appropriate discrete voltage levels and measuring gain control voltage vs. power data pairs $(V_{\text{agc}}(i), P(i))$ that are stored in the current control look-up table. As the gain control voltage is stepped up in order to measure the whole dynamic range, the current control is
15 stepped up accordingly.

The calibration method for this alternative will now be described in greater detail with reference to the procedure shown in Figure 8 of the accompanying drawings. The procedure relies on data from the current control look-up table. Therefore, before the procedure can begin, the current control look-up table must be
20 created, using the procedure illustrated in Figure 4 for example. This is represented by block 60 in Figure 8. Note that in block 60 values of $V_{\text{control}}(j)$ are stored against values of $P(j)$. The procedure for creating the gain control look-up table begins at block 61 and involves an integer number i of repetitions of the same sequence of steps. The integer i need not be the same as the integer j in block 60. Consequently,
25 for a given value of desired output power P there may not be an exactly matching entry in the current control look-up table.

In block 62 the value of $V_{\text{control}}(j)$ required to give the desired output power $P(i)$ is determined from the current control look-up table. The value of $V_{\text{control}}(j)$ is determined by identifying adjacent values of output power, i.e. $P(j)$ and $P(j+1)$
30 between which the desired value $P(i)$ lies and taking the value of V_{control} for the higher of the two power values thus identified. Put another way, the value of $P(j)$ closest to and above the desired value $P(i)$ is used to determine the appropriate value for $V_{\text{control}}(j)$. In block 63 a voltage V_{control} corresponding to the value $V_{\text{control}}(j)$ is applied

to the power amplifier 22 (see Figure 1). The higher value is chosen because this ensures that the ACLR margin is at least the specified minimum.

The transmitter circuit is now set up to enable the voltage V_{agc} applied to the VGA amplifier 16 (see Figure 1) to be adjusted until the power in the signal output from the transmitter is equal to $P(i)$. This is represented by block 64 in Figure 8. Once this has been achieved, a value $V_{agc}(i)$ corresponding to the applied voltage V_{agc} is stored against $P(i)$ in the gain control look-up table, is shown in block 65. The value of i is incremented in block 66 and the operations represented by blocks 61 to 65 are repeated for all n values of i .

Figure 9 of the accompanying drawings illustrates how during a "closed loop" call, the required output power is compared with the data in the look-up tables and with this data the baseband circuitry 12 (see Figure 1) sets the appropriate values of V_{agc} on line 17 and $V_{control}$ on line 23. Data ($P_{desired}$) 70 is applied as the input to both the gain control look-up table 71 and the current control look-up table 72. The two look-up tables 71, 72 respond by outputting values for V_{agc} and $V_{control}$ respectively. There may not be an exact value of power P in the look-up tables to that of the desired power. Instead, the value of $P_{desired}$ will lie between two adjacent values of $P(i)$ in the look-up tables. Both look-up tables are therefore arranged to output two values of V_{agc} and $V_{control}$ corresponding to the adjacent values of $P(i)$.

The two values output from the look-up tables 71, 72 are input to respective interpolators 73, 74 which calculate actual values of V_{agc} and $V_{control}$ therefrom. The calculated values V_{agc} and $V_{control}$ from the interpolators 73, 74 are input to associated digital to analog converters (DACs) 75, 76 which are also provided in the baseband circuitry of Figure 1 and convert the values into corresponding voltages V_{agc} and $V_{control}$, respectively are applied to the VGA amplifier 16 and the power amplifier 22 of Figure 1.

The method illustrated in Figure 8 is less demanding of memory because it requires only two look-up tables. It is, however, less accurate and it is possible that the values stored in the two look-up tables could cause a discontinuity in the output power when the current control voltage changes from $V_{control}(j)$ to $V_{control}(j+1)$, as the gain control voltage is gradually stepped up. This is because the current control voltage changes the gain of the power amplifier as well as the bias current applied to it. So a step change of the current control voltage will produce a step change in power, which slightly deviates (depending on the resolution of the current control steps) from

the linearised gain control characteristic. Careful selection of values of i and j in the Figure 8 procedure will avoid significant discontinuities and thus any problems that might be associated with such changes.

5 The methods and procedures so far described rely on the assumption that the voltage between any adjacent output power values $P(j)$ and $P(j+1)$ is constant, i.e. the voltage changes in a stepwise manner. Another way of calculating the control characteristics from the discrete values is to assume that for every adjacent pairs of points $V(j)$, $P(j)$ and $V(j+1)$, $P(j+1)$ the characteristic is linear, i.e. changes continuously between adjacent points. Using this assumption only two look-up tables
10 are required: one look-up table for values of V_{agc} against desired power; and one look-up table for $V_{control}$ against desired power. This approach also causes power discontinuities to be minimized as should become clear from the following description.

15 Figure 10 of the accompanying drawings is a block diagram illustrating a suitable calibration procedure to obtain data for use under this assumption. The calibration procedure comprises four operations. One, a look-up table is defined. Two, values of $V_{control}$ are stored in the defined look-up table. Three, starting values of V_{agc} are generated and stored in the defined look-up table. This step is optional, although it does facilitate subsequent processing of the data. Four, new optimum values of V_{agc}
20 are generated and stored in the defined look-up table. Block 80 represents the beginning of the operation to define a look-up table. A single look-up table (LUT) may be defined for all i values from 1 to n of $V_{control}(i)$, $P(i)$ and $V_{agc}(i)$, as represented by block 81a, or alternatively, two separate look-up tables may be defined for all i values from 1 to n of $V_{control}(i)$ and $P(i)$, and $V_{agc}(i)$ and $P(i)$, as represented by block
25 81b. The look-up tables are defined once i has reached the value of n at block 82.

At this stage, or indeed even before the look-up tables have been defined, the control voltage ($V_{control}$) and power (P) characteristics (see Figures 3 and 4) are measured in block 83.

30 The procedure then moves on to the operation that results in starting values of V_{agc} being generated and stored in the defined look-up table(s). The operation begins at block 84 and again repeats for each value of i from 1 to n . In block 84a the i th value of required power, i.e. $P(i)$ is input and in block 85 a value of $V_{control}(i)$ is determined by looking up in the current control look-up table values of $V_{control}(j)$ and $V_{control}(j+1)$ stored against two values of $P(j)$ and $P(j+1)$ adjacent to the desired value

of $P(i)$. This is similar to the approach previously described with reference to Figure 9. However, instead of simply taking the lowest of the two V_{control} values, i.e. $V_{\text{control}}(j)$ as was previously the case, both values $V_{\text{control}}(j)$ and $V_{\text{control}}(j+1)$ are used to determine a value for $V_{\text{control}}(i)$. A value for $V_{\text{control}}(i)$ is calculated by interpolation
5 between or extrapolation from the values $V_{\text{control}}(j)$ and $V_{\text{control}}(j+1)$. The value of $V_{\text{control}}(i)$ is then stored in the look-up table(s) created in block 81a or 81b. The procedure is repeated for all values of i from 1 to n , as determined at block 86.

On exit from block 86 the procedure may, optionally, continue at block 87 where an operation begins that results in starting values of V_{agc} being generated and
10 stored in the look-up table defined at block 81a or 81b for every value of i from 1 to n . A starting value for $V_{\text{agc}}(i)$ can readily be obtained from previously determined power amplifier characteristics. This procedure is similarly repeated for all values of i from 1 to n , as determined at block 89. An advantage of executing this optional procedure is that it saves time in deriving the optimum values of V_{agc} .

15 Alternatively, on exit from block 86 the procedure may continue at block 90 to the generation of optimum values of V_{agc} . In this procedure, again for all values of i from 1 to n , the voltage V_{control} applied to the power amplifier 22 of Figure 1 is set at a level corresponding to the value $V_{\text{control}}(i)$, as represented by block 91. Then, as shown in block 92, the voltage V_{agc} applied to the VGA amplifier 16 of Figure 1 is adjusted
20 until the required Adjacent Channel Leakage Ratio (ACLR) linearity is achieved. This adjustment can be effected more efficiently if the initial voltage V_{agc} applied to the VGA amplifier 16 is close to what it should be. Starting from an arbitrary voltage (e.g. 0 volts) results in a longer time being taken to get to the required value. That is why the storing of initial values for $V_{\text{agc}}(i)$ is optional. The value of $V_{\text{agc}}(i)$ is stored as
25 represented by block 93, and the procedure is likewise repeated for all values of i from 1 to n , as determined at block 94.

The look-up table(s) thus created is used in a similar manner to that already described with reference to Figure 7 to control the amplifiers in the transmitter circuit when the transmitter is in a "closed loop" call. From the data stored in the look-up
30 tables the baseband circuitry 12 extrapolates the correct values for both voltages V_{control} and V_{agc} . The current control voltage V_{control} is set first and then the gain control voltage V_{agc} .

This method produces minimal discontinuities in output power because the current control characteristic is smooth and both control signals V_{control} and V_{agc} are

adjusted simultaneously for each new power level. The method also requires only two look-up tables, which reduces hardware overheads but it may require more processor power because of the extra computation involved.

The foregoing method assumes that matching power values are required for the V_{agc} and the $V_{control}$ look-up tables. It is however possible to effect a trade off between power control accuracy and memory (look-up tables) overheads by omitting the look-up table for $V_{control}$ against power. The measurements of $V_{control}$ against P obtained by the procedure of Figure 4 can instead be used together with interpolation to obtain reasonably accurate values for V_{agc} and $V_{control}$.

Figure 11 of the accompanying drawings shows a streamlined version of the calibration procedure set out in Figure 10. In this version of the procedure blocks 80 to 83 remain, although block 81b is simplified by only defining a look-up table for V_{agc} (and not for $V_{control}$). Blocks 84 to 89 are omitted, so that once the measurement of $V_{control}$ vs. P (as per Figure 4) is complete the procedure continues at block 90. For each value of $i=1$ to n the required power $P(i)$ is input to enable values to be read from the look-up table. This is represented by block 95 in Figure 11.

As has been explained previously (with reference to Figure 9 in relation to $P(i)$ and $P_{desired}$) there may not be an exact value of P in the look-up table corresponding to that of the required power $P(i)$ and, consequently, the value of $P(i)$ will lie between two adjacent values of P in the look-up table. The look-up table therefore outputs two adjacent values for $V_{control}$, which are interpolated in block 96 to give a single value for $V_{control}$. In block 97 the voltage $V_{control}$ applied to the power amplifier 22 is set equal to the value output from the look-up table, and in block 92 (corresponding to block 92 in Figure 10) the voltage V_{agc} applied to the VGA amplifier is adjusted, thus causing the transmitter to transmit a signal at the required power. The value of $V_{agc}(i)$ is stored (as it was in Figure 10) and optionally and additionally the value of $V_{control}(i)$ is stored in block 93a. The procedure is repeated for all values of i from 1 to n , as determined at block 94.

Having thus described the invention by reference to a preferred embodiment it is to be well understood that the embodiment in question is exemplary only and that modifications and variations such as will occur to those possessed of appropriate knowledge and skills may be made without departure from the spirit and scope of the invention as set forth in the appended claims and equivalents thereof.

CLAIMS:

1. A method of calibrating a transmitter circuit having a first characteristic controllable by a first control signal and a second characteristic controllable by a second control signal, the method comprising:

defining a set of multiple signal values for the first control signal;

setting the first control signal to a level corresponding to a signal value from the set of multiple first control signal values;

adjusting the second control signal to cause the transmitter to operate in a desired manner;

measuring power in a signal transmitted by the transmitter while operating in the desired manner; and

repeating the setting, adjusting and measuring for each signal value in the set of multiple first control signal values.

2. A method as claimed in claim 1, further comprising recording data representing the measured power against the signal value from the set of multiple first control signal values.

3. A method as claimed in claim 1 or 2, wherein the data is recorded as entries in a look-up table.

4. A method as claimed in claim 1, 2 or 3, wherein the desired manner is defined by parameters including an adjacent channel leakage ratio range.

5. A method as claimed in any preceding claim, wherein the transmitter circuit comprises a first amplifier and a second amplifier, and the first characteristic is a characteristic of the first amplifier and the second characteristic is a characteristic of the second amplifier.

6. A method as claimed in claim 5, wherein the first amplifier comprises a power amplifier and the characteristic controlled by the first control signal comprises supply current to the power amplifier.

7. A method as claimed in claim 5 or 6, wherein the second amplifier comprises a conditioning amplifier, and the characteristic controlled by the second control signal comprises the gain of the conditioning amplifier.

5 8. A method of calibrating a transmitter circuit having a first characteristic controllable by a first control signal and a second characteristic controllable by a second control signal, the method comprising:

defining a set of multiple signal values for the first control signal;

10 defining a set of multiple power values representing power in a signal transmitted by the transmitter;

setting the first control signal to a level corresponding to a signal value from the set of multiple first control signal values;

selecting a power value from the defined set of multiple power values;

15 adjusting the second control signal to cause the transmitter to transmit a signal with a power corresponding to the selected power value; and

repeating the selecting and adjusting for each power value in the set of multiple power values.

20 9. A method as claimed in claim 8, further comprising recording data representing the second control signal against the power in the transmitted signal.

25 10. A method as claimed in claim 8 or 9, further comprising repeating the setting, adjusting, selecting and repeating for each signal value from the set of multiple first control signal values.

30 11. A method as claimed in claim 10 as dependent on claim 9, further comprising recording the data representing the second control signal and the power in the transmitted signal against the signal value from the set of multiple first control signal values.

12. A method as claimed in claim 10 or 11, wherein the data representing the second control signal and the power in the transmitted signal is stored in a separate list for each signal value from the set of multiple first control signal values.

13. A method as claimed in claim 12, wherein the data in each separate list is recorded as entries in a respective look-up table.

14. A method as claimed in claim 8 or 9, wherein the set of multiple signal values
5 for the first control signal is defined by using previously created data representing transmitted signal power values against first control signal values.

15. A method as claimed in claim 13, wherein the previously created data is used
10 by selecting a power value from the defined set of multiple power values and calculating a signal value for the first control signal.

16. A method as claimed in any of claim 8 to 15, wherein the transmitter circuit
comprises a first amplifier and a second amplifier, and the first characteristic is a
15 characteristic of the first amplifier and the second characteristic is a characteristic of the second amplifier.

17. A method as claimed in claim 16, wherein the first amplifier comprises a power
amplifier and the characteristic controlled by the first control signal comprises supply
20 current to the power amplifier.

18. A method as claimed in claim 16 or 17, wherein the second amplifier
comprises a conditioning amplifier, and the characteristic controlled by the second
control signal comprises the gain of the conditioning amplifier.

25 19. A method as claimed in claim 14 or 15, wherein the previously created data is created using a method as claimed in any of claims 1 to 7.

20. A method as claimed in claim 19, further comprising:
storing a set of starting values for the second control signal; and
30 using the set of starting values when adjusting the second control signal to cause the transmitter to transmit a signal with a power corresponding to the selected power value.

21. A transmitter comprising:

a receiver for receiving power data specifying a power value;
an amplifier having a first characteristic controllable by a first control signal
and a second characteristic controllable by a second control signal;
a store for storing data representing power values, corresponding first control
5 signal values and corresponding second control signal values;
a controller coupled to the receiver and the store and responsive to the
received power data for generating from the data stored in the store a first control
signal for controlling the first characteristic and a second control signal for controlling
the second characteristic.

10

22. A transmitter as claimed in claim 21, wherein the amplifier comprises a first
amplifier and a second amplifier, and the first characteristic is a characteristic of the
first amplifier and the second characteristic is a characteristic of the second amplifier.

15 23. A transmitter as claimed in claim 22, wherein:

the store comprises a look-up table;

the controller comprises an analog-to-digital converter coupled to the
amplifiers;

20 the controller is arranged to apply the received power data to the look-up
table;

the look-up table is arranged to respond to the application of received power
data by supplying data to the analog-to-digital converter; and

25 the analog-to-digital converter is arranged to respond to the supplied data by
outputting the first control signal to the first amplifier and the second control signal to
the second amplifier.

30 24. A transmitter as claimed in claim 23, wherein the controller is arranged to
output the first control signal values and the second control signal values directly to
the analog-to-digital converter.

25. A transmitter as claimed in claim 23 or 24, wherein the controller comprises a
processor for:

processing data from the store to produce data defining the first control signal
and the second control signal; and

outputting the same to the analog-to-digital converter.

26. A transmitter as claimed in any of claims 21 to 25, wherein the store comprises:

5 a first look-up table for storing data representing power values and corresponding first control signal values; and

a second look-up table for storing data representing power values and corresponding second control signal values.

10 27. A transmitter as claimed in claim 26, wherein:

the store comprises multiple second look-up tables, one for each value in a set of first control signal values; and

the processor is arranged to use the specified power data to produce a first control signal value from the first look-up table and to use the thus produced first control signal value to identify a second look-up table for use in producing a second control signal value depending on the specified power data.

28. A transmitter as claimed in claim 22 or any of claims 23 to 27 as dependent thereon, wherein the first amplifier comprises a power amplifier and the characteristic controlled by the first control signal comprises supply current to the power amplifier.

29. A method as claimed in claim 22 or any of claims 23 to 28 as dependent thereon, wherein the second amplifier comprises a conditioning amplifier, and the characteristic controlled by the second control signal comprises the gain of the conditioning amplifier.

30. A transmitter as claimed in any of claims 21 to 29, wherein the data in the store is generated using the method as claimed in any of claims 1 to 17.



30 31. A method substantially as described herein with reference to the accompanying drawings.

32. An apparatus substantially as described herein with reference to the accompanying drawings.

ABSTRACT

A TRANSMITTER AND A METHOD OF CALIBRATING POWER IN SIGNALS OUTPUT FROM A TRANSMITTER

A transmitter circuit 10 with a first characteristic controllable by a first control signal and a second characteristic controllable by a second control signal is calibrated using a calibration method to enable accurate power control. The transmitter circuit 10 will typically comprise a VGA amplifier 16 and a power amplifier 22. Typically, the gain of the VGA amplifier 16 is controlled and so is the current supplied to the power amplifier 22. The method comprises a number of operations including defining a set of multiple signal values for the first control signal, setting the first control signal to a level corresponding to a signal value from the set of multiple first control signal values. Then the second control signal is adjusted to cause the transmitter to operate in a desired manner and the power in a signal transmitted by the transmitter is measured. The setting, adjusting and measuring is repeated for each signal value in the set of multiple first control signal values.

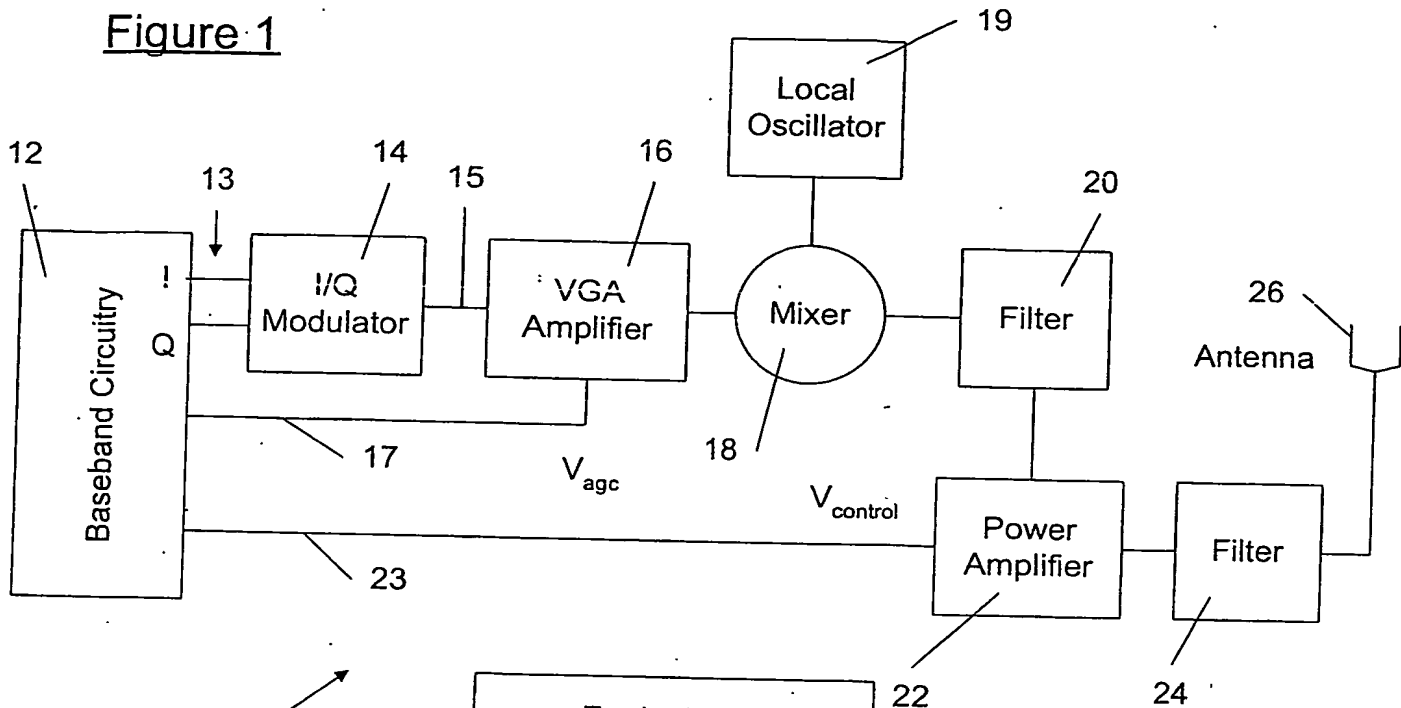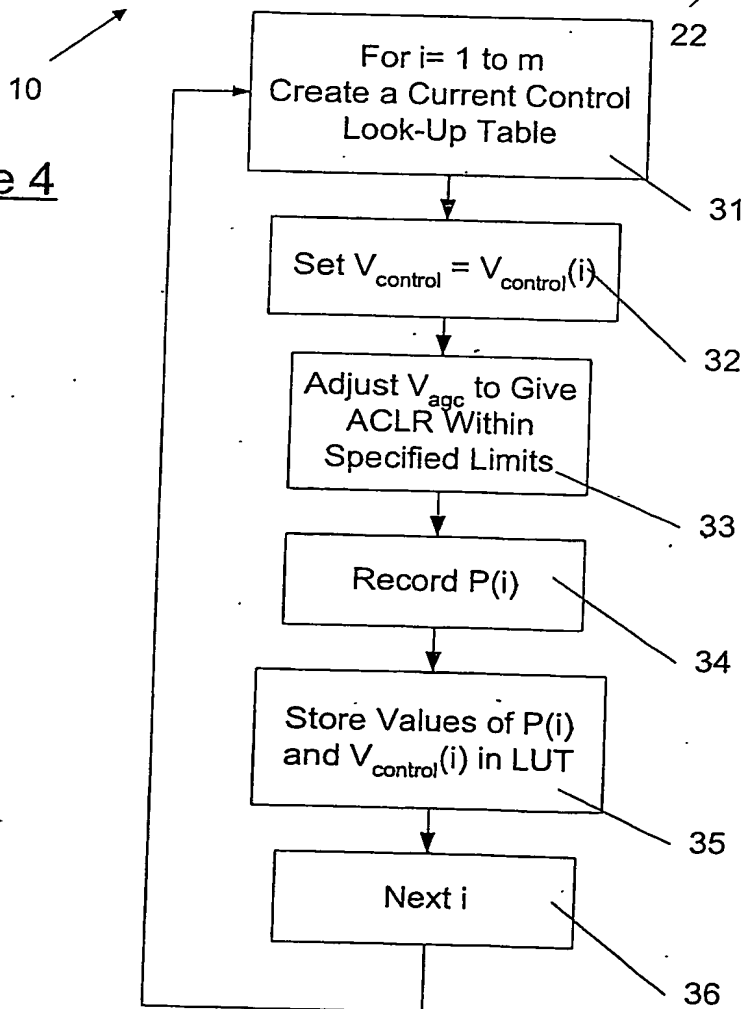Figure 1Figure 4

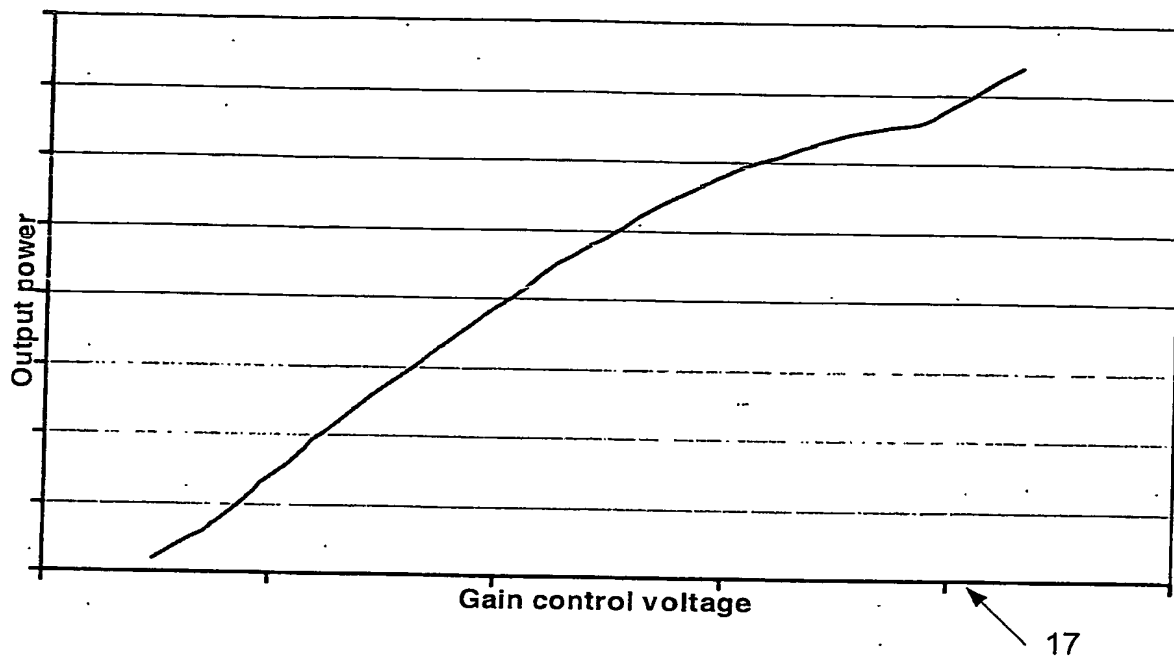


Figure 2

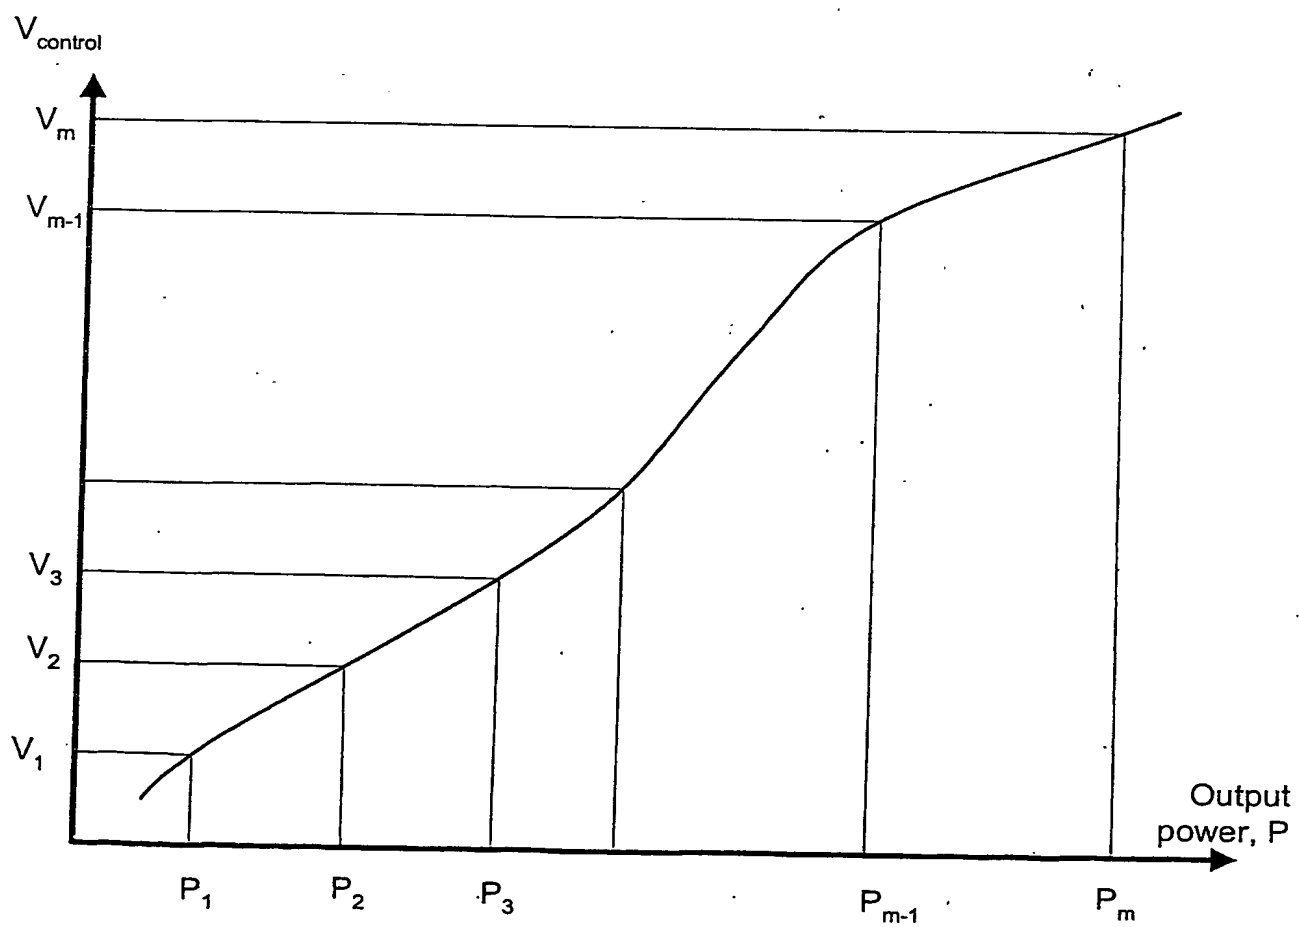


Figure 3

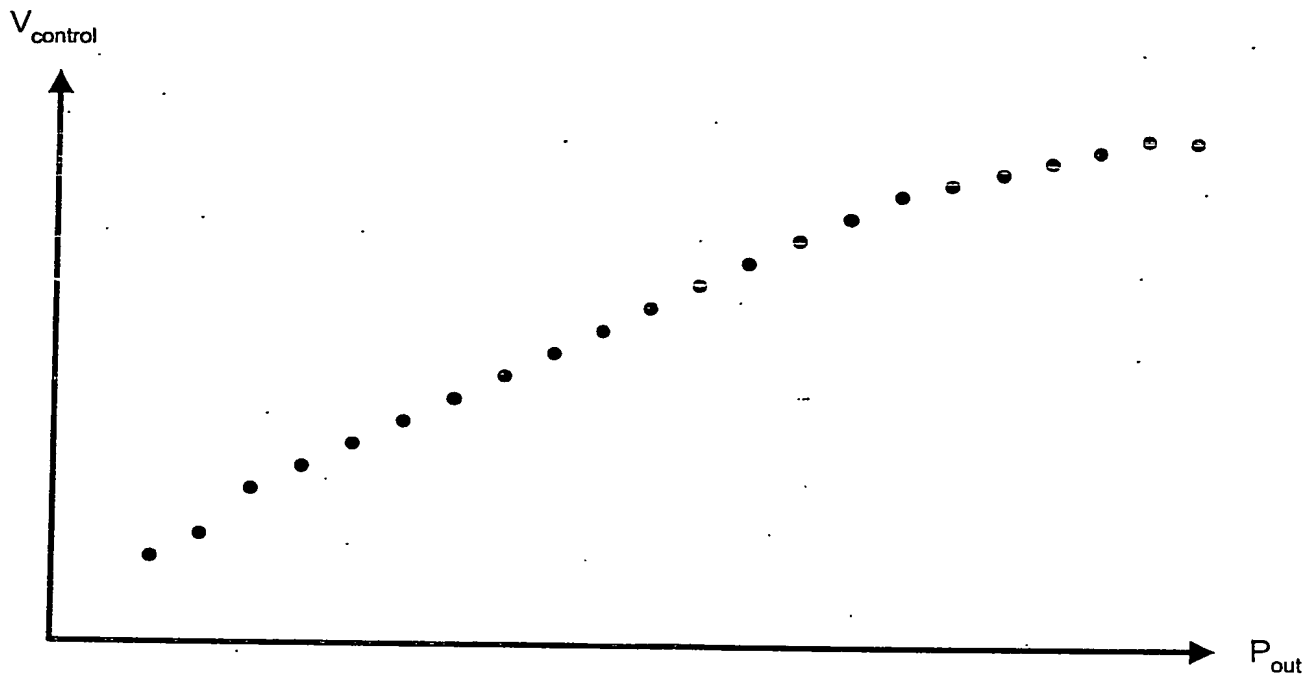


Figure 5

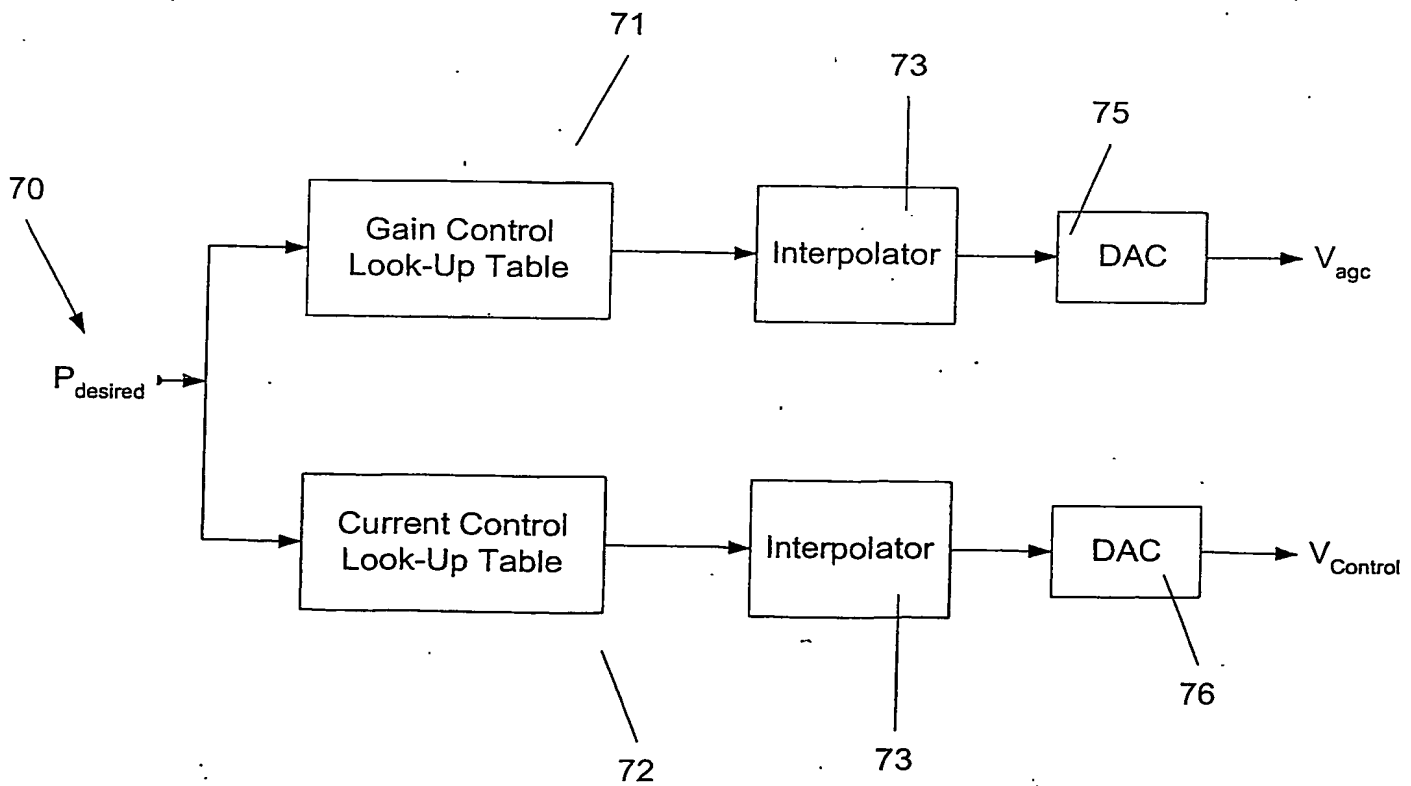


Figure 9

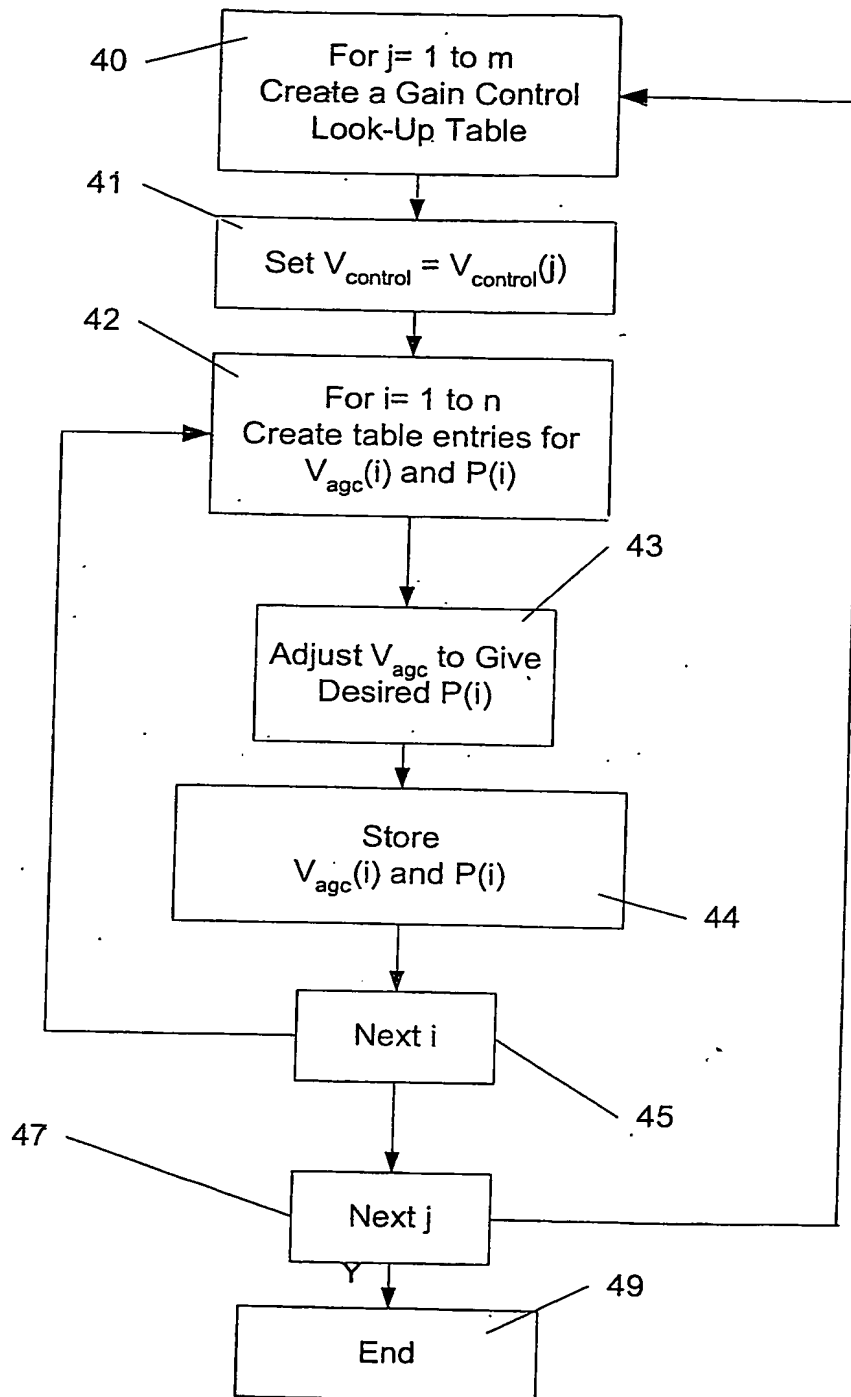
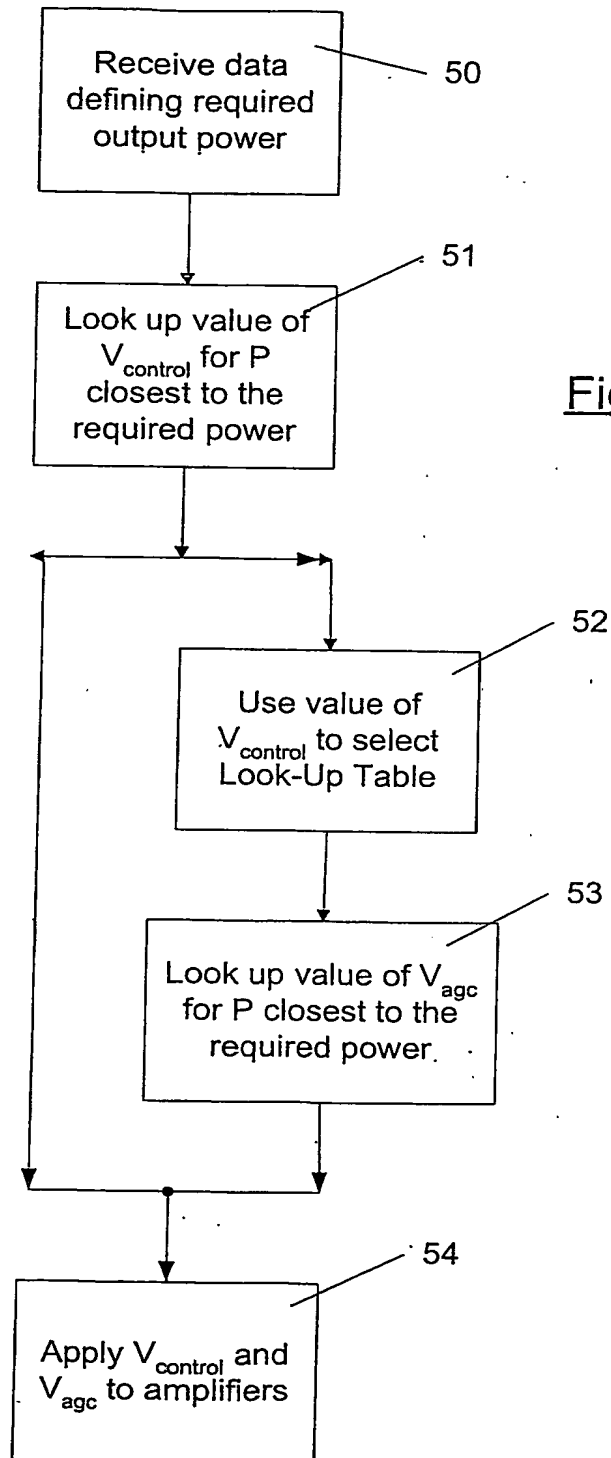
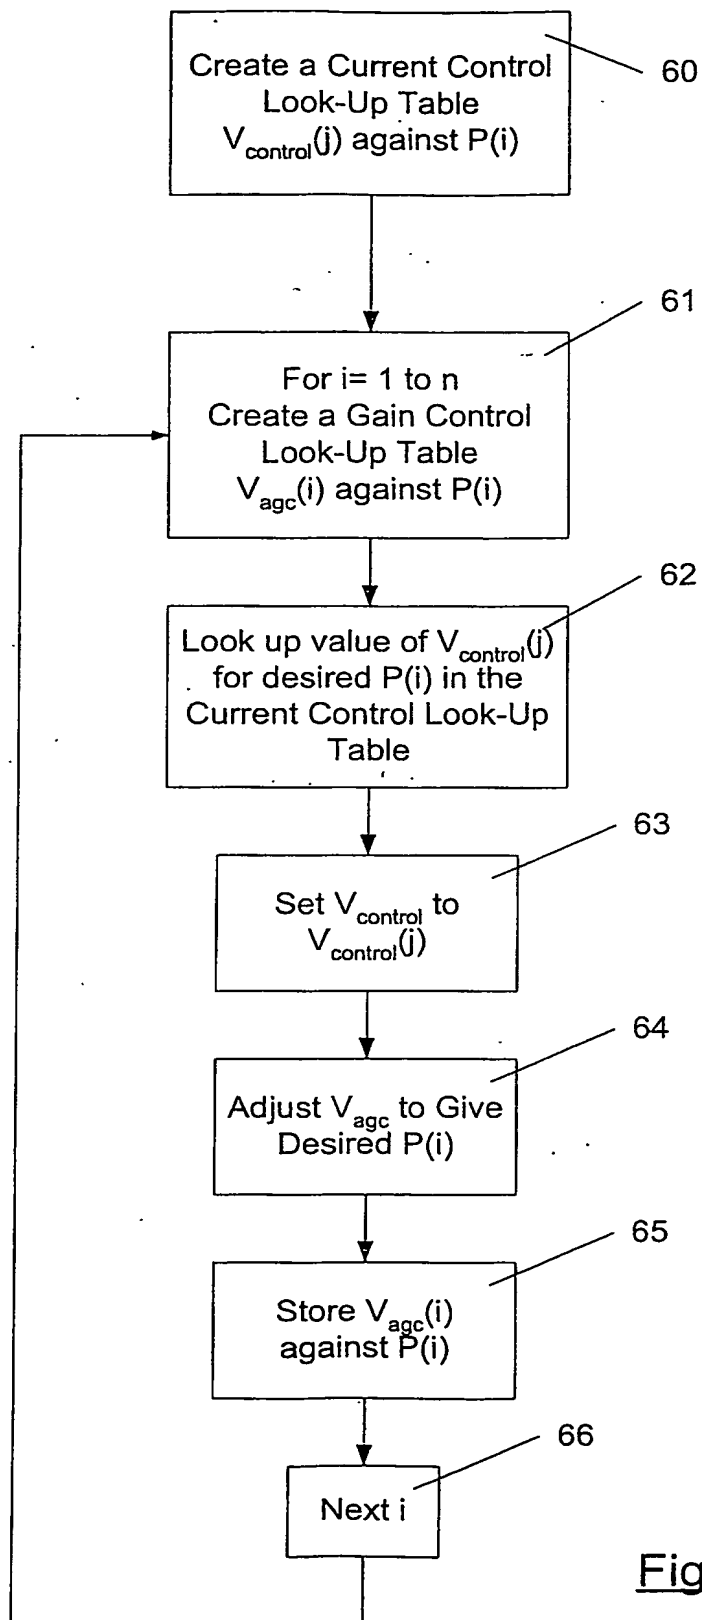


Figure 6

Figure 7

Figure 8

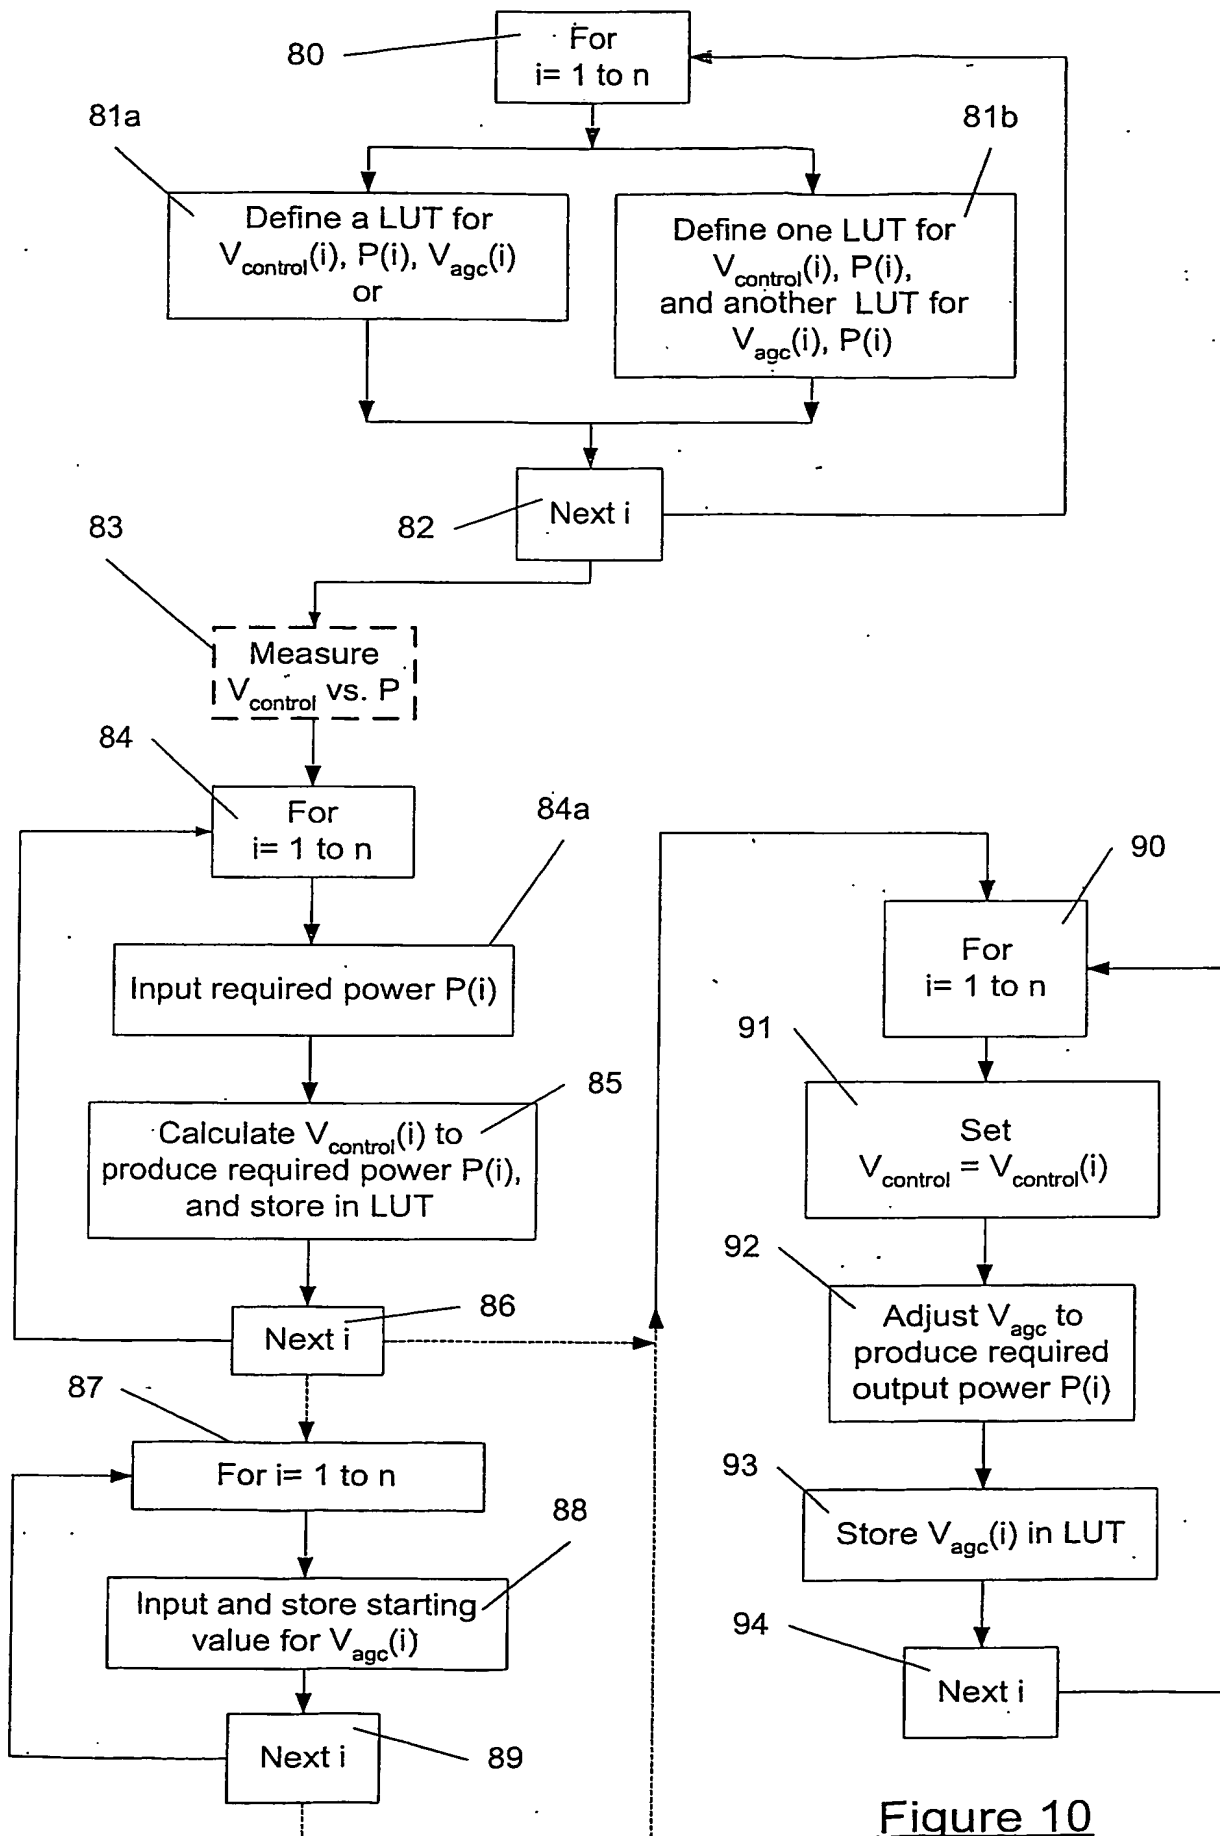


Figure 10

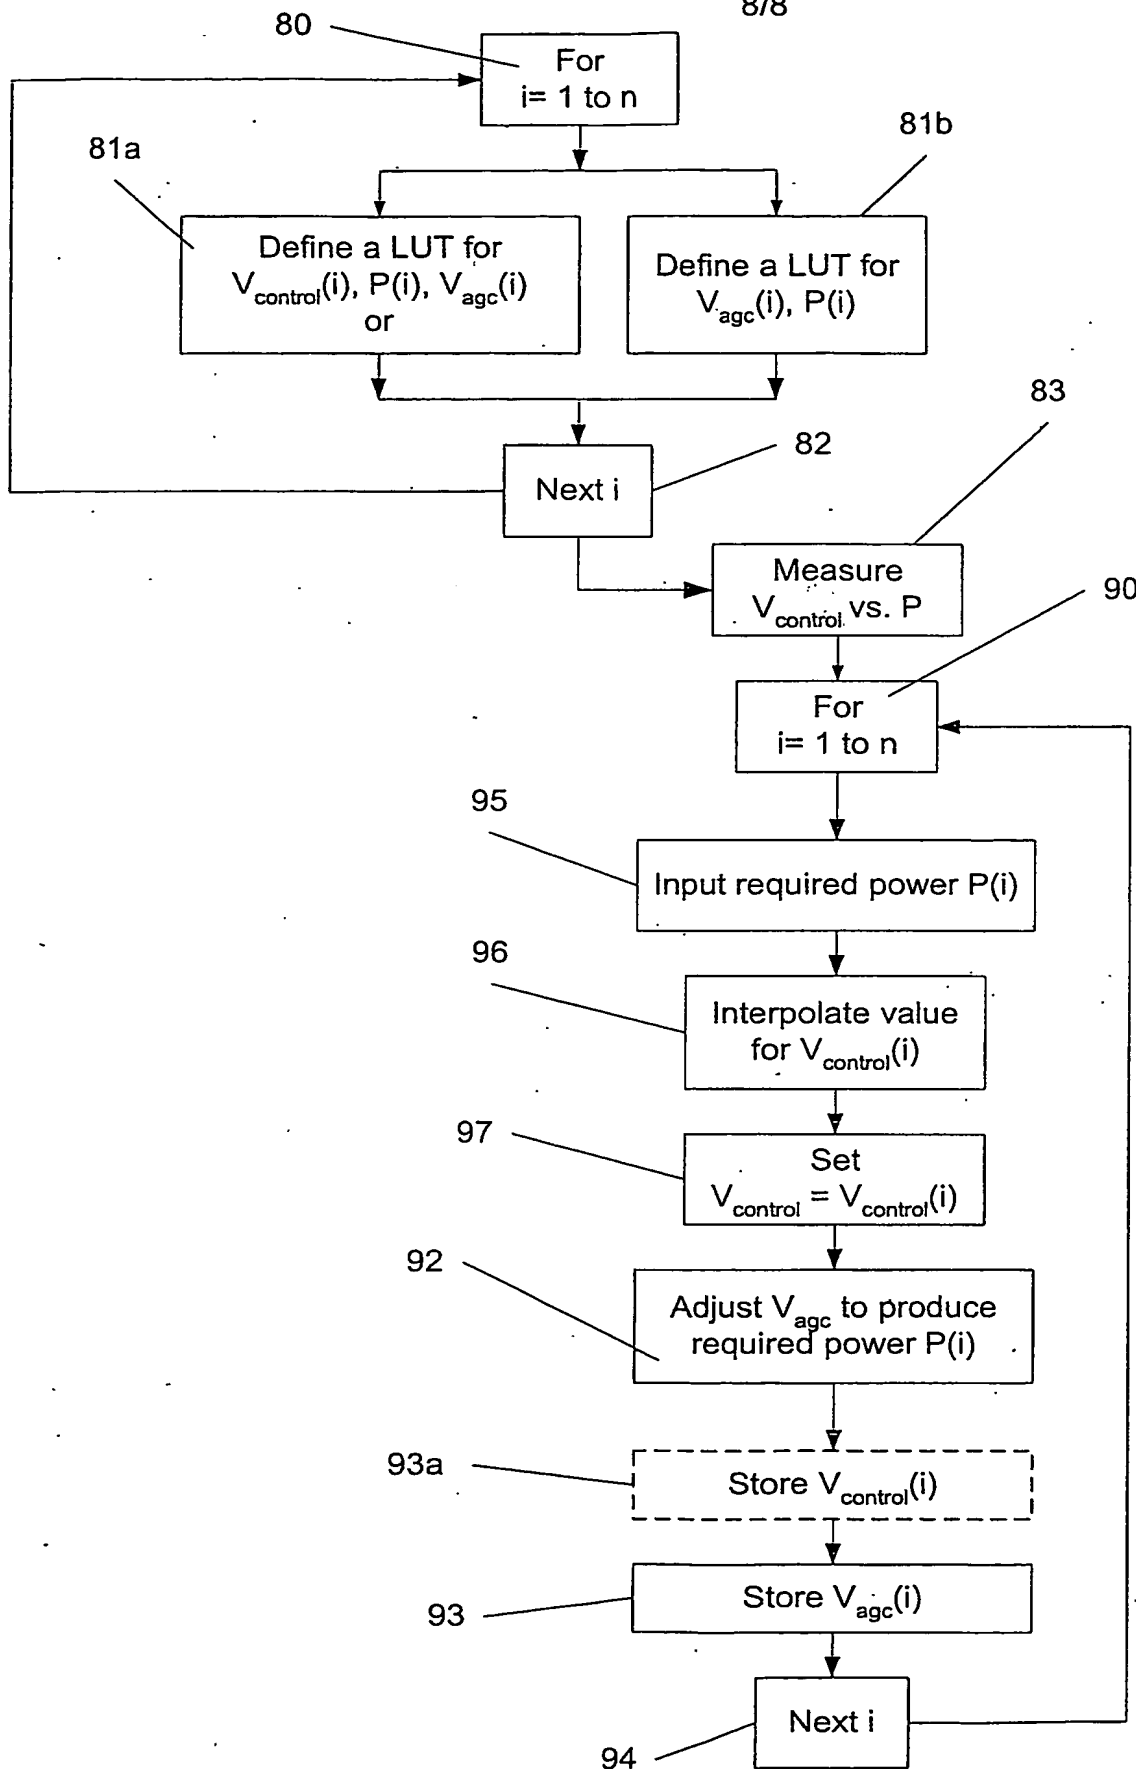


Figure 11

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.